Gotec

OEM

SOLENOID PUMPS

EBQ200

TECHNICAL DATA

DIMENSIONS

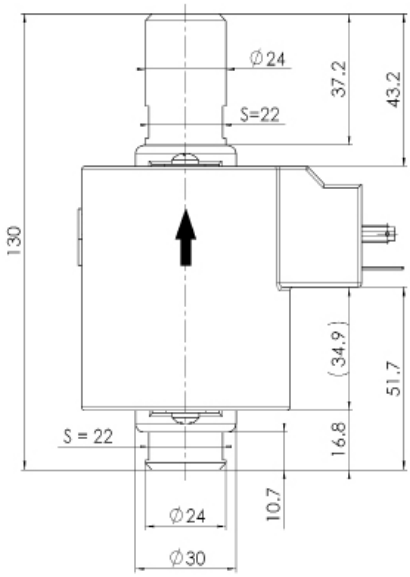

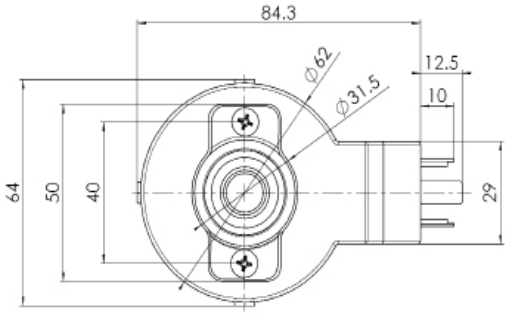

NOMINAL RATED DATA

Max. pressure		20[bar]
Max. flow rate		35[l/h]
Max. suction height		0.5[m]
Viscosity range		1...600[mm2/s]
Filter		Mesh 100
Tension		230[V] (110V)
Frequency		50, 60[Hz]
Electrical connection		DIN 43650
Hydraulic connection		Internal G3/8¨ thread
Power		120[W]
Weight		~1110[g]
Temperature		1...50[°C]
Insulation	Class H Class 1	100% ED / 20 [°C]

Gotec Since 1964

Route de Mangold 11
CH - 1958 St-Léonard

Tél. +41 (0)27 205 72 05

info@gotec.ch
www.gotec.ch

SWISS MADE

Gotec

OEM

SOLENOID PUMPS

EBQ200 230V

TECHNICAL DATA

PERFORMANCES

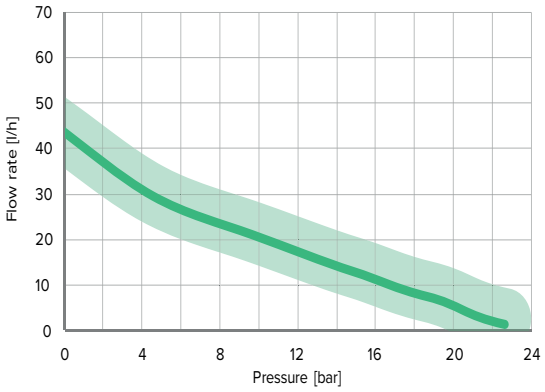

OPEN FLOW & TEMPERATURE

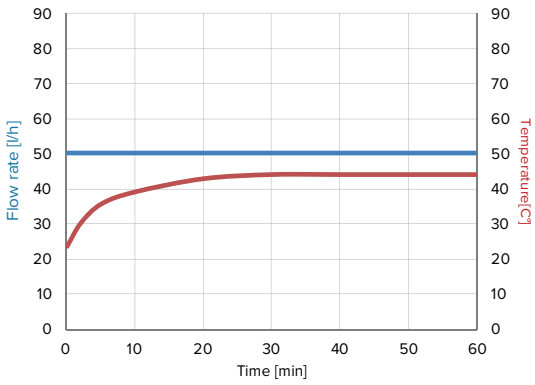

Tested with 20°C of water at ambient temperature

ACCESSORIES

Rubber mounting

ELECTRIC WIRING DIAGRAM

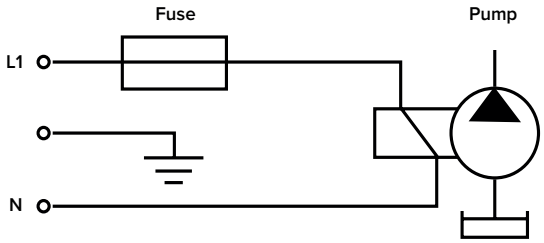

Large choice of materials & options

Please refer to instruction manual for more installation details. For more information, visit our website : **www.gotec.ch**

Certifications

RoHS 2002/95/EC · REACH · c UL us · SGS · CE

Gotec Since 1964

Route de Mangold 11
CH - 1958 St-Léonard

Tél. +41 (0)27 205 72 05

info@gotec.ch
www.gotec.ch

SWISS MADE